



D007S | Series

四针六线曲臂式并缝机

4 Needle 6 Thread Feed-off-the-arm Flatseamer



4 Needle 6 Thread Feed-off-the-arm Flatseamer

D007S - 4

52

- 02

R

T1 - ET /

TT

针数
Needle
numbers



48


52

60


64

切刀
Trimmer

01



02



特殊规格
Special specification

R 弧状车缝
Curved seaming

H 厚类车缝
(过目、过骨车缝)
Heavy-weight
material seaming
(cross seaming of
binding / taping or
overlock seam)

AC 布边防卷曲
Anti-Curl Edge

AT 气动抬压脚
Pneumatic Foot lifter
ET 电动抬压脚
Electric Foot lifter

选配件
Attachment

机种别
Model

D007S
一般型
General type

D007SX
双差动
Double Differential Type

车缝功能
Sewing function

S 裤袜
For panty hose

DS 潜水衣
For diving suit

T1 织带 (女用内衣裤)
For attaching woven tape
(Women's underwear)

T2 贴条 (男用内衣裤)
For attaching folded tape
(Men's underwear)

4L10 段差型压脚针板组
Step type Presser foot and
4L15 Needle plate

4L20 1.0 .1.5 .2.0 mm



D007S

D007S 专为贴身衣物与机能型运动衣的叠并缝所设计，提供即强韧又柔和的车缝效果

For intimate fit wear or high-end sportswear's flat-seaming, D007S realizes the strong and delicate sewing quality.

特

点

FEATURE

全新密闭式押脚机构，实现零漏油的目标

Brand new sealed type presser foot mechanism realizes the target of zero oil leakage.

功能齐全的压具，满足各种缝制需求

Full range of presser foots fulfills various sewing demands.

全系列搭配直驱伺服马达，高效节能，动力充沛

Powerful direct-drive servo motor makes high performance with low energy consuming.

标配自动抬压脚功能，可选择气动型或电动型

Presser foot lifter is a standard equipment, which pneumatic and electric types are optional.



选 购 件

OPTIONAL ATTACHMENT

AW1 外接空压式吸布屑组
External compressor type waste suction set

AW2 吸风马达式吸布屑组
Suction motor type waste suction set

AK 电眼气动切线组（附 AW7 吸布屑组）
Sensor controlled pneumatic type chain cutter (with AW7 waste suction set)


TT 送带机（适用 T1 规格）
Tape feeding device (For T1 specification)




TT



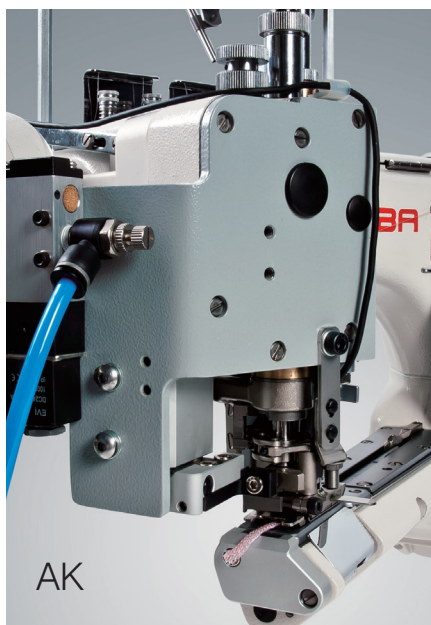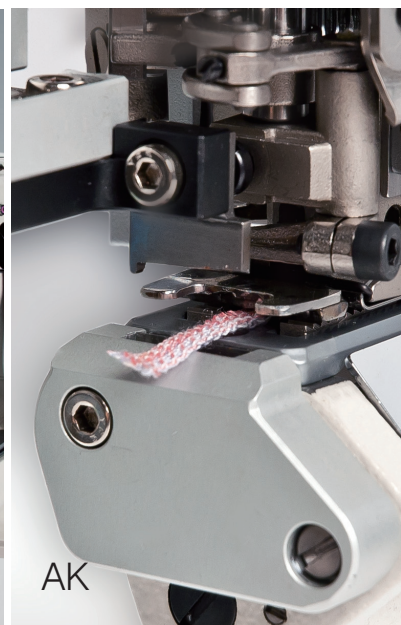AW1












AK






















AK

规格 SPECIFICATION

MODEL	 x								OPTIONAL				
D007S-4□□-01	4	6	48/52/60/64		1:0.7 1:1.5	mm	Needle No.	S.P.M. (Max)	AT/ET/AW1/AW2/AK				
D007S-4□□-02	4	6	48/52/60/64						8	FL X 118GCS (4 PCS)	4200	AT/ET/AW1/AW2/AK	
D007S-4□□-02R	4	6	48/52/60/64						6			AT/ET/AW1/AW2/AK	
D007S-4□□-02H	4	6	52/60						6			AT/ET/AW1/AW2/AK	
D007S-4□□-01-S	4	6	52/60						8			FLG - 8 (1 PC)	AT/ET/AW1/AW2/AK
D007S-4□□-02-S	4	6	52/60						6				AT/ET/AW1/AW2/AK
D007S-4□□-01-DS	4	6	52/60						8				AT/ET/AW1/AW2/AK
D007S-4□□-02-T1	4	6	48/52/60						6				AT/ET/AW1/AW2/TT/AK
D007S-4□□-01-T2	4	6	52/60						8				AT/ET/AW1/AW2/AK
D007S-4□□-02-T2	4	6	52/60						6			AT/ET/AW1/AW2/AK	

Remarks : FLG - 8为假针规格,避免车缝薄软面料之缝份起皱。
FLG - 8 is a retainer for seaming light / soft materials without seam wrinkling.

Model	Trimming	Cross-section	Fabric Weight		
			Light	Medium	Heavy
D007S-4□□-01/					
D007S-4□□-02					
D007S-4□□-02R					
D007S-4□□-02H					
D007S-4□□-01-S					
D007S-4□□-02-S					
D007S-4□□-01-DS*					
D007S-4□□-02-T1					
D007S-4□□-01-T2					
D007S-4□□-02-T2					

「*」 DS model : 出厂标准为不需切布之接并缝, 而此单切款也可适用于迭并缝。
「*」 DS model : Butt seam is the standard setting. Lap seam by one side trimming is available.



由於对产品的改良及更新, 本产品型录中之产品规格及外观的修改恕不事先通知!
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.